



CHOTANAGPUR LAW COLLEGE

(A NAAC Accredited Institution)

Nyay Vihar Campus, Namkum, Ranchi - 834010 (Jharkhand)

City Office : Upper Bazar, Ranchi - 834001 (Jharkhand)

Affiliated to : Bar Council of India, New Delhi ❖ Ranchi University, Ranchi

CNL/TENDER/G/256/25

Date: 31.07.2025

Tender Notice

As per the Design, Drawing and BOQ which is enclosed herewith, sealed tenders are invited for installation of Shed on Roof Top of Library Building of the college.

Tenders should reach the office of undersigned on or before 07.08.2025 by 02.00 pm by hand/ by registered post.



The tender will be opened on 08.08.2025 at 3.30 pm and will be informed to L1.

Terms & Conditions:

1. Firm must be registered in all respect.
2. Firm must have atleast 05 years work experiences in this field.
3. Firm must attach proof of work. (Bonafide certificate(s) from client whose work was done by firm)
4. Tender would be in favour of Principal, Chotanagpur Law College, Ranchi.
5. Work must be completed as per supply order.
6. Payment would be made as per schedule formulated by the Authorized Architect M/s Aakriti Associates, Ranchi.


Address of the college:

Finance Section
Chotanagpur Law College, Ranchi
Nyay Vihar Campus,
Tata Road, Namkum, Ranchi-834010.


Bursar
Dr. G. Anbilung
Chotanagpur Law College
Bursar Ranchi
Chotanagpur Law College, Ranchi



ESTIMATE & BOQ


S. No	Items & its Description	Quantity	Rate	Amount
1	<p>Providing, Fabricating & erecting Structural steelwork for Trusses, Purling ,gantry Columns, Pipes, Beams & others structural members with all bracings, gusset plates etc erection and fixing in position making alignment of members making welded/bolted/riveted connection including providing and fixing precoated galvanized steel sheet roofing accessories 0.45to0.50mm thickness (TATA make) with proper fastener device etc complete as per detailed drawings or as directed by engineer in charge,</p> <p>It also also include the Following Civil Work:-</p> <ol style="list-style-type: none">1. Brickwork if any in CM 1:42. Plastering Work in CM 1:43. Wall putty/Primer /Plastic Paint shall be applied over wall area of Asian paint or equivalent <p>It also also include the Following Electrical Work:-</p> <ol style="list-style-type: none">4. Sufficient electrical light point/Fan point/ AC Point/Switches etc (Havells/Anchor) shall be provides as per the drawings /Instruction of Engineers	4050sqft	625/-sqft	25,31,250/-
2	<p>Providing and fixing of power coated three track aluminum window with 4mm clear glass including all fitting and fixtures</p>	600sqft	300/-sqft	1,80,000/-



3	Providing and Laying of Vitrified floor tiles of 2'X2" of approved color and make including laying of cement mortar, laying of tiles in proper gradient and filling of its joint etc complete as per design and specification	3250sqft	115/-sqft	3,73,750/-
4	Providing and Fixing of False ceiling with PVC sheet of approved color and make with sufficient light point including its finishing complete as per design and specification	3250sqft	170/-sqft	5,52,500/-
		TOTAL=		36,37,500/-

Thirty Six Lakh, Thirty Seven Thousand, Five Hundred Only.



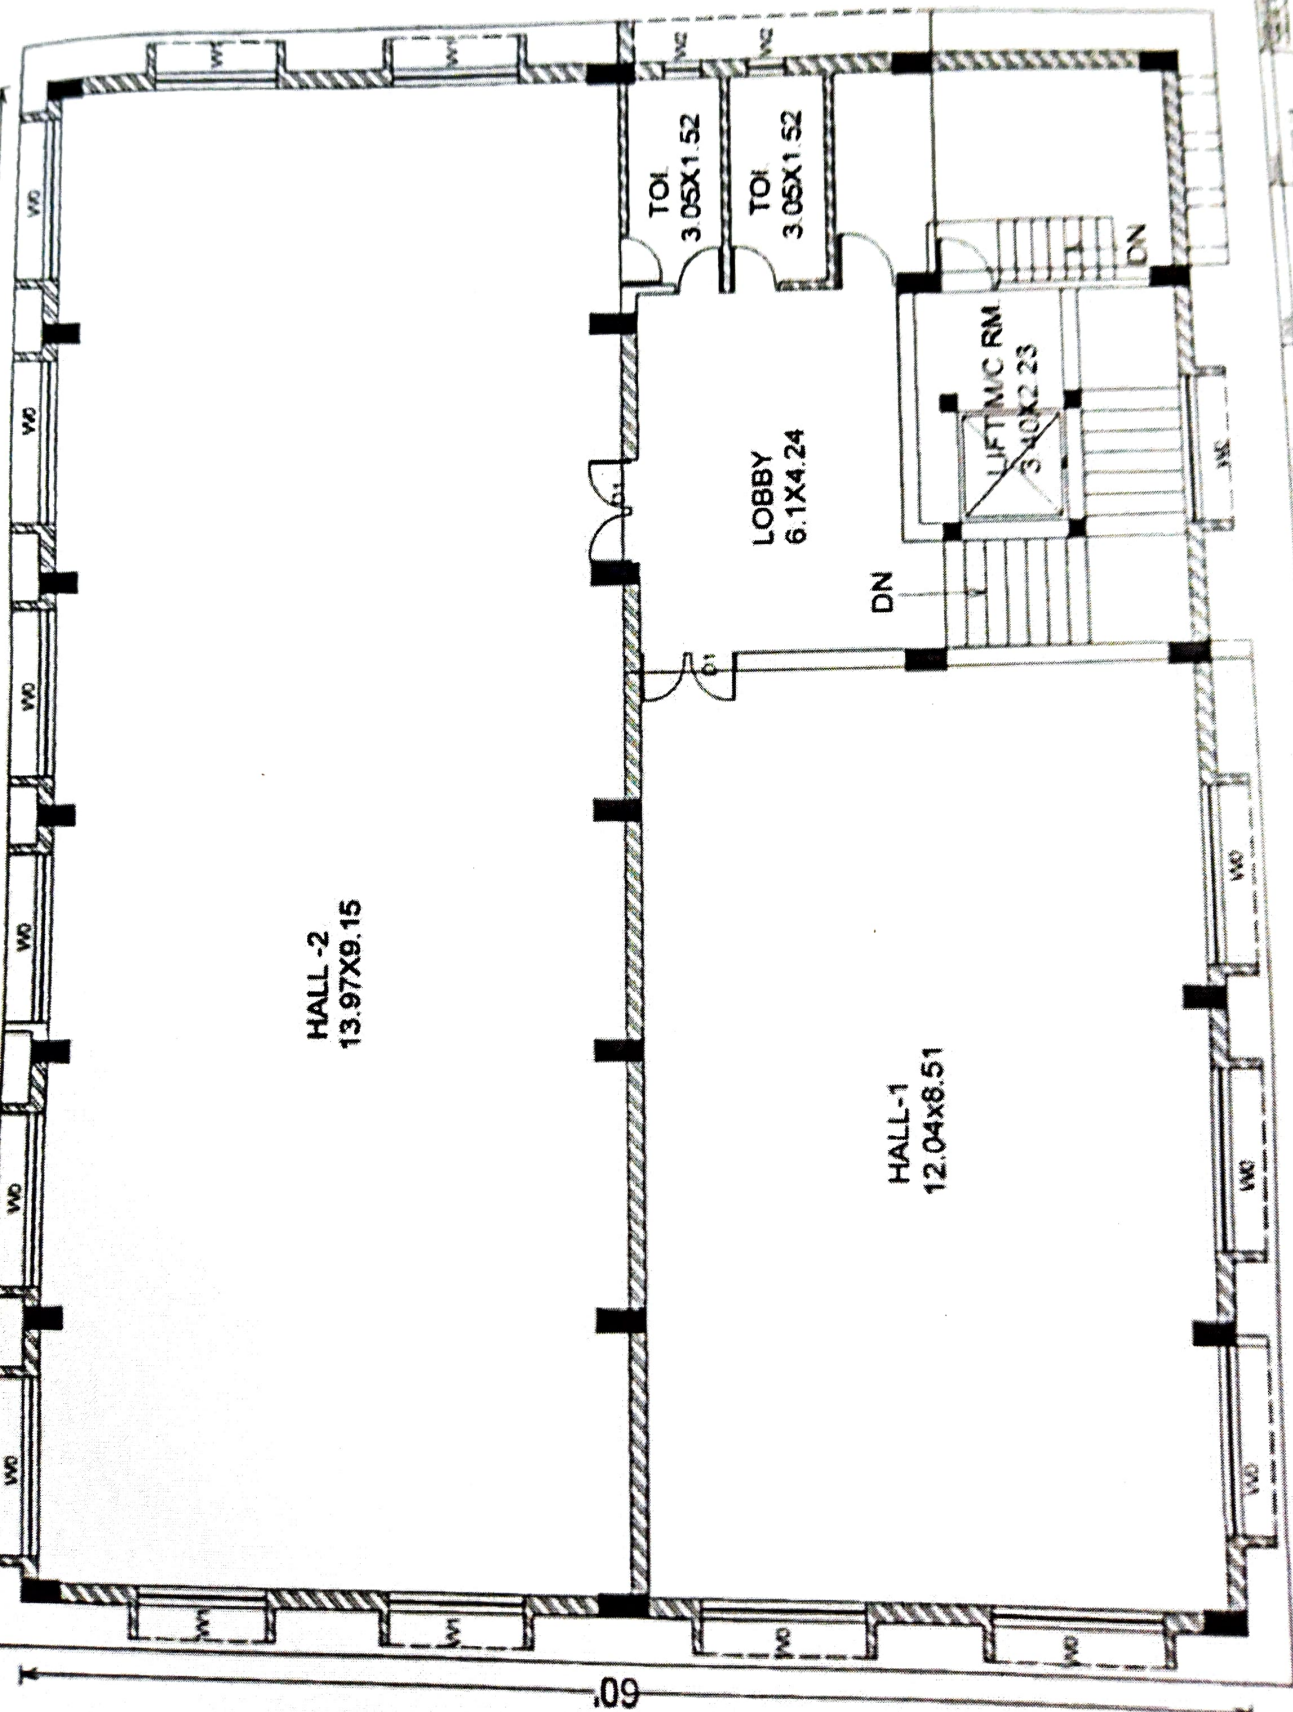

HALL-2
13.97X9.15

HALL-1
12.04x8.51

LOBBY
6.1X4.24

LIFT/MC RM
3.40X2.23

TOI
3.05X1.52

TOI
3.05X1.52

.09

